



ACX[®] 6X4

SEVERE DUTY CABOVER



ACX[®] 6X4

Representative ACX Key Specifications.
Your truck will be custom-engineered for
your application

ALL DIMENSIONS IN INCHES

CAB INTERNAL DIMENSIONS

ACX 6x4 Typical
Cummins L9 Engine
Allison 4500
Meritor 20K Steer Axle
Meritor RT46 Rear Axle
Hendrickson HMX 46K
Rear Suspension HMX-EX
210" Wheelbase
62" Overhang

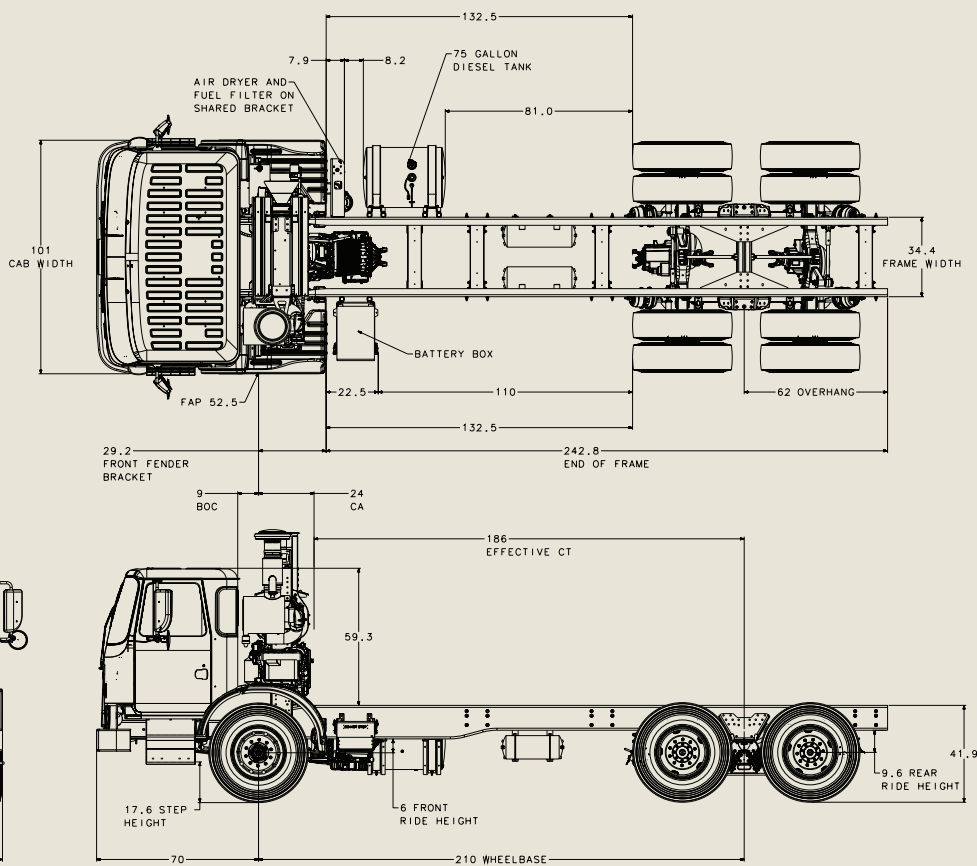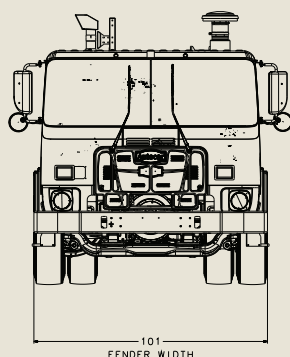

ENGINE AND EQUIPMENT	
Engine model	Cummins L9 rated from 300 hp to 380 hp / 860-1250lb-ft
	Cummins X12 rated from 350 hp to 380 hp / 1350-1450lb-ft
	Cummins L9N (natural gas) rated from 300 hp to 320 hp / 860-1000lb-ft
	Cummins X12N (natural gas) rated at 320 to 350 hp / 1250-1350lb-ft
Exhaust (Diesel)	Horizontally mounted SMA (single module aftertreatment) with LHVE (left hand vertical exhaust)
	Horizontally mounted SMA (single module aftertreatment) with RHVE (right hand vertical exhaust)
Exhaust (Gas)	Horizontally mounted 3-way catalyst on BOC with LHVE (Left hand vertical exhaust)
	Horizontally mounted 3-way catalyst on BOC with RHVE (Right hand vertical exhaust)
	Horizontally mounted 3-way catalyst on BOC with RHUFE (Right hand under frame exhaust) (CNG only)
	Horizontally mounted 3-way catalyst on frame rail with RHUFE available for L9&N

ENGINE AND EQUIPMENT	
Air cleaner	15 inch single stage EPG
	15 inch single stage with safety element EPG
	16 inch 2 stage
	15 inch two stage steel air cleaner with safety element
Radiator	1300 sq. inch aluminum
	1118 sq inch bar plate (Electrical operated cooling fans or EMP)
Fan & drive	2-speed fan drive
	On/Off fan drive
	Variable speed fan drive
	Electrical operated cooling fans
Coolant hoses/piping	Silicone hoses with constant tension clamps
Coolant	Extended life coolant

TRANSMISSION AND EQUIPMENT	
Transmission model	Allison 3000 RDS (not available with X12 or ISX12N)
	Allison 4500RDS
Transmission gearing	5 or 6-speed
Transmission controls	Allison push button
Transmission cooler	Remote mounted oil to coolant layered core oil cooler
Transmission lubricant	TES 295 Allison approved synthetic auto trans fluid
Driveshaft	Dana Spicer® half-round, yoke size 1710 or 1810 dependent on transmissions and driveline rotational speeds

CHASSIS AND EQUIPMENT	
Wheelbase	Available in 3 inch increments between 144 inch and 264 inch
Frame	3/8 inch Variable drop rail, 120 kPsi heat treated steel, RBM of 3,259,000 lb.in to 4,220,000 lb. independent on drop configuration and liners
	3/8" drop belly frames, 120ksi heat treated, similar RBM
Heavy-duty front end	Available for severe duty service applications such as snow plowing
Tow device	Two tow pins integral with front crossmember

CAB AND EQUIPMENT	
Cab construction	The cab is constructed from corrosion-resistant steel followed by a Cathodic Electrocoat dip process before the top coat is applied
Cab drive configuration	Single LH drive
	Single RH drive
	Dual drive dual sit
	Dual drive RH standup
	Single LH drive RH standup
Cab doors	Steel doors with power or manual crank window regulators
	Aluminum fold-up doors for stand-up and low entry options
Mirrors	Black or chrome plastic housing with dual pane mirrors. Options include power adjustment, heat and integrated marker lights
Cab climate control system	30,000 BTU air conditioner with heater
Steering column	Adjustable for tilt on single drive cab configurations
Steering wheel	16 or 18 inch diameter
Driver seats	National Cush II low back air ride
	Sears C2+ air ride with air lumbar support
	Sears C2+ air ride with air lumbar support and headrest
	Various Bostrom selections
Passenger seats	National Crush II low back
	Fixed type low back
	Sears C2+ air ride with air lumbar support
	Sears C2+ air ride with air lumbar support and headrest
	Various Bostrom selections

FRONT AXLE AND EQUIPMENT	
Axle model	Meritor MFS-20
	Meritor MFS-18
	Meritor MFS-16
	Dana D-2200W
	Hendrickson Steertek 20K
Front suspension	9,500 lb Low camber flat leaf rated at 20,800 lb capacity
	10,100 lb Flat leaf rated at 22,000 lb capacity
	6500 lb Taper leaf rated at 14500 lb capacity
	7250 lb Taper leaf rated at 16000 lb capacity
	8250 lb Taper leaf rated at 18000 lb capacity
	10,200 lb Taper leaf rated at 22,000 lb capacity
	Hendrickson 20K taper leaf front suspension (Only available with Steertek axle)
Power steering	Sheppard M100PPV3 with assist ram / TRW TAS65 with ram assist
Brakes	Meritor 16.5 x 6
	Meritor 16.5 x 7
	Meritor EX225H2 air disc

REAR AXLE AND EQUIPMENT	
Axle model	Meritor MT40-14X
	Meritor MT40-14X with 1/2 inch housing
	Meritor MT44-14X
	Meritor RT46-160
	Meritor RT46-164 EH
	Meritor RT52-185
Rear axle ratio	4.89 to 6.14 Dependent on axle model, vehicle configuration and application
Rear suspension	Haulmaax HMX-EX 400 at a 54 inch axle spread, rated at 40,000 lb capacity
	Haulmaax HMX-EX 460 at a 54 inch axle spread, rated at 40,000 lb capacity
	HN522 at a 54 inch axle spread, rated at 52,000 lb capacity
	Primaax EX-462 Air Ride at a 54 inch axle spread, rated at 46,000 lb capacity
	Haulmax HMX-EX 520, 54 inch axle spread
Brakes	Meritor 16.5 x 7
	Meritor 16.5 x 8.62 QP
	Meritor EX225H2 air disc

Autocar, LLC makes no claim of ownership to any other parties' trademarks or logos shown herein, which are the property of their respective owners.